



# Q.MAXX-G4 SERIES



400-410 Wp | 108 Cells  
21.4% Maximum Module Efficiency

MODEL Q.MAXX-G4



### A reliable investment

Inclusive 25-year product warranty and 25-year linear performance warranty<sup>1</sup>



### Enduring high performance

Long-term yield security with Anti LeTID Technology and Hot-Spot Protect.



### The most thorough testing programme in the industry

Qcells is the first solar module manufacturer to pass the most comprehensive quality programme in the industry: The new "Quality Controlled PV" of the independent certification institute TÜV Rheinland.



### More suitable size for residential installation.

More suitable length for residential installation with its length less than 1700 mm, Q.MAXX-G4 provides with easier system designs and installations.



### Breaking the 21% efficiency barrier

Q.ANTUM DUO Z technology with zero gap cell layout boosts module efficiency up to 21.4%.



### Extreme weather rating

High-tech aluminium alloy frame, certified for high snow (8100 Pa) and wind loads (4000 Pa).



### Innovative all-weather technology

Optimal yields, whatever the weather with excellent low-light and temperature behaviour.

<sup>1</sup> See data sheet on rear for further information.

### The ideal solution for:



Rooftop arrays on residential buildings






# Q.MAXX-G4 SERIES

## Mechanical Specification

Format	1692 mm × 1134 mm × 32 mm (including frame)
Weight	20.9 kg
Front Cover	3.2 mm thermally pre-stressed glass with anti-reflection technology
Back Cover	Composite film
Frame	Black anodised aluminium
Cell	6 × 18 monocrystalline Q.ANTUM solar half cells
Junction box	53-101 mm × 32-60 mm × 15-18 mm Protection class IP67, with bypass diodes
Cable	4 mm <sup>2</sup> Solar cable; (+) ≥1250 mm, (-) ≥1250 mm
Connector	Stäubli MC4, Hanwha Q CELLS HQC4; IP68

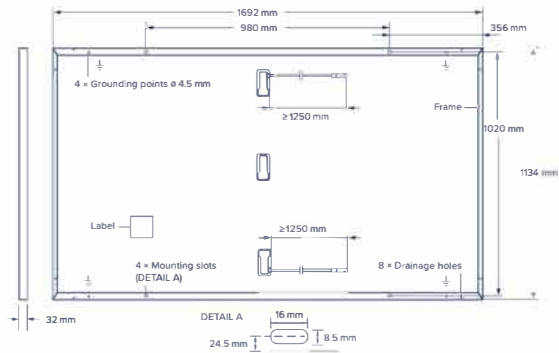


## Electrical Characteristics

POWER CLASS			400	410
MINIMUM PERFORMANCE AT STANDARD TEST CONDITIONS, STC <sup>1</sup> (POWER TOLERANCE +5W/-5W)				
Minimum	Power at MPP <sup>1</sup>	P <sub>MPP</sub> [W]	400	410
	Short Circuit Current <sup>1</sup>	I <sub>SC</sub> [A]	13.54	13.61
	Open Circuit Voltage <sup>1</sup>	V <sub>OC</sub> [V]	371.6	372.1
	Current at MPP	I <sub>MPP</sub> [A]	12.90	13.04
	Voltage at MPP	V <sub>MPP</sub> [V]	31.00	31.43
	Efficiency <sup>1</sup>	η [%]	≥20.8	≥21.4
MINIMUM PERFORMANCE AT NORMAL OPERATING CONDITIONS, NMOT <sup>2</sup>				
Minimum	Power at MPP	P <sub>MPP</sub> [W]	300.1	307.6
	Short Circuit Current	I <sub>SC</sub> [A]	10.91	10.97
	Open Circuit Voltage	V <sub>OC</sub> [V]	35.04	35.09
	Current at MPP	I <sub>MPP</sub> [A]	10.16	10.28
	Voltage at MPP	V <sub>MPP</sub> [V]	29.54	29.91

<sup>1</sup>Measurement tolerances P<sub>MPP</sub> ±3%; I<sub>SC</sub>; V<sub>OC</sub> ±5% at STC; 1000 W/m<sup>2</sup>, 25 ±2 °C, AM 1.5 according to IEC 60904-3 • <sup>2</sup>800 W/m<sup>2</sup>, NMOT, spectrum AM 1.5

## Qcells PERFORMANCE WARRANTY

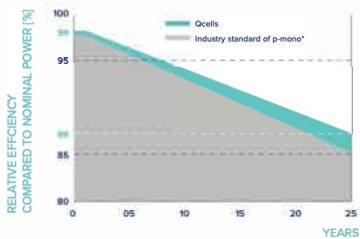


At least 98% of nominal power during first year. Thereafter max. 0.5% degradation per year. At least 93.5% of nominal power up to 10 years. At least 86% of nominal power up to 25 years.

All data within measurement tolerances. Full warranties in accordance with the warranty terms of the Qcells sales organisation of your respective country.

<sup>\*</sup>Standard terms of guarantee for the 5 PV companies with the highest production capacity in 2021 (February 2021)

## PERFORMANCE AT LOW IRRADIANCE



Typical module performance under low irradiance conditions in comparison to STC conditions (25 °C, 1000 W/m<sup>2</sup>).

## TEMPERATURE COEFFICIENTS

Temperature Coefficient of I <sub>SC</sub>	α [%/K]	+0.04	Temperature Coefficient of V <sub>OC</sub>	β [%/K]	-0.27
Temperature Coefficient of P <sub>MPP</sub>	γ [%/K]	-0.34	Nominal Module Operating Temperature	NMOT [°C]	43 ± 3

## Properties for System Design

Maximum System Voltage	V <sub>sys</sub> [V]	1000	PV module classification	Class II
Maximum Reverse Current	I <sub>R</sub> [A]	25	Fire Rating based on ANSI/UL 61730	C/TYP2
Max. Design Load, Push/Pull	[Pa]	5400/2660	Permitted Module Temperature on Continuous Duty	-40 °C - +85 °C
Max. Test Load, Push/Pull	[Pa]	8100/4000		

## Qualifications and Certificates

Quality Controlled PV - TÜV Rheinland, IEC 61215:2016; IEC 61730:2016. This data sheet complies with DIN EN 50380.



Made in China

## Packaging Information



Specifications subject to technical changes © Qcells Q.MAXX-G4\_400-410\_2022-06\_Rev01\_AU

Qcells pursues minimizing paper output in consideration of the global environment.

Note: Installation instructions must be followed. Contact our technical service for further information on approved installation of this product.  
Hanwha Q CELLS Australia Pty Ltd. Suite 1, Level 1, 15 Blue Street, North Sydney, NSW 2060, Australia | TEL +61 02 9016 3033 | EMAIL inquiry.aus@qcells.com | WEB www.qcells.com/au/

